



# 360Xi

FRAMING NAILER



[www.paslode.co.uk](http://www.paslode.co.uk)



## NEVER STOP BUILDING

# 360Xi

## FRAMING NAILER



PLEASE ADHERE TO SAFETY RECOMMENDATIONS & WARNINGS AT ALL TIMES

### CONGRATULATIONS

Thank you for choosing a Paslode tool. The 360Xi framing nailer is compact, well-balanced, capable of firing both RounDrive® nails and NailScrews. It has an intelligent fuel injection system which delivers all weather functioning performance.

### THE TOOL



### TECHNICAL DATA

Product weight	3.6 kg
Size / depth	376mm / 121mm
Power	105 J
Fastener length range	50 -90mm
Maximum Cycle rate per hour (fixings)	1000 fixings
Maximum Cycle rate per sec (fixings)	2-3 fixings
Magazine capacity	47 fixings
Fuel cell capacity	1100 (-5°C) shots
Fixings per battery charge	13 000 shots
Battery charge time	90 Min.
Battery type	Lithium
Operating temperature range	-15°C...+49°C
Peak Sound Pressure (EN 12549) LpCpeak	135 dB(C)
Workplace Relevant Emission, LpA	95 dB(A)
Vibration (EN ISO 8662-11) ahv	3,9 m/s <sup>2</sup>

### IN YOUR KIT

- 360Xi Framing Nailer
- Lithium Battery
- Lithium Battery Charger
- Safety eye protection to EN166-F standard.
- Allen Key
- Instruction Manual
- Tool Schematics
- Safety Instructions
- CE & UKCA Declaration of Conformity

### CONSUMABLES YOU NEED

RounDrive® 34° Nails  
 Ø = 2.5 > 3.1 mm  
 L = 50 > 90 mm  
 Smooth & Ring



### IF YOU NEED EXTRA ACCESSORIES



Series-i Fuel Cell 300348  
 Li-ion Battery 018880  
 Impulse Cleaning Kit 013690  
 Battery Charger 018882

### INDEX:

- Getting Started Pg 4-5
- Tool Lights Pg 5
- Tool Adjustment Pg 6-7
- Tool Maintenance Pg 8-9
- Trouble Shooting Pg 10
- Paslode Range Pg 11



Refer to [www.paslode.co.uk](http://www.paslode.co.uk) for further information on your tool and FAQ.

## GETTING STARTED

### FUEL CELL




= 1100 (-5°C)



Check fuel is in date  
(see base of fuel)

### CONSUMABLES

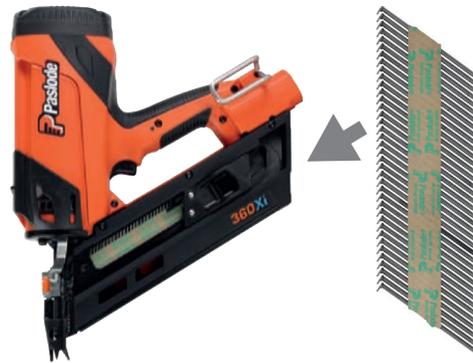

#### 360Xi

RoundDrive® 34° Nails  
Ø = 2.5 > 3.1 mm  
L = 50 > 90 mm  
(Smooth & Ring)



## GETTING STARTED


### BATTERY



= 13000 max

	15 min.	2 500 max.
	60 min.	10 000 max.
	90 min.	13 000 max.

### LED LIGHTS

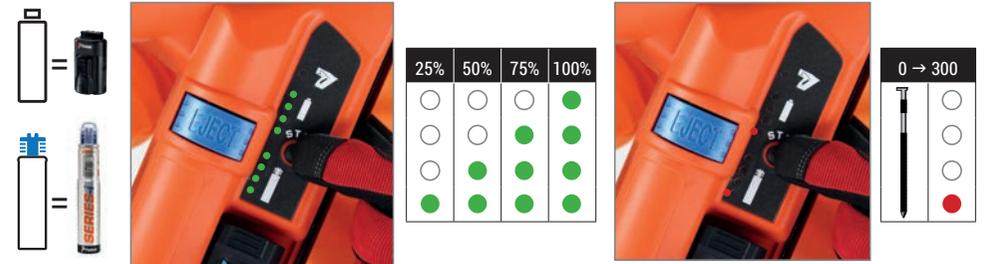

### RESTING POSITION

If you need to rest or place the tool down, please place in the following position:



## TOOL ADJUSTMENTS

-15°C	1 000 /hour
≤ T ≤	
+49°C	4 000 /day



## ROTATING BELT HOOK



## DEPTH OF DRIVE



## ACTUATING THE TOOL



## TOOL MAINTENANCE: FILTER


### CLEANING KIT 013690




## TOOL MAINTENANCE: FAN

### PLEASE USE:

- CLEANING KIT 013690 AND THE O RING 013231

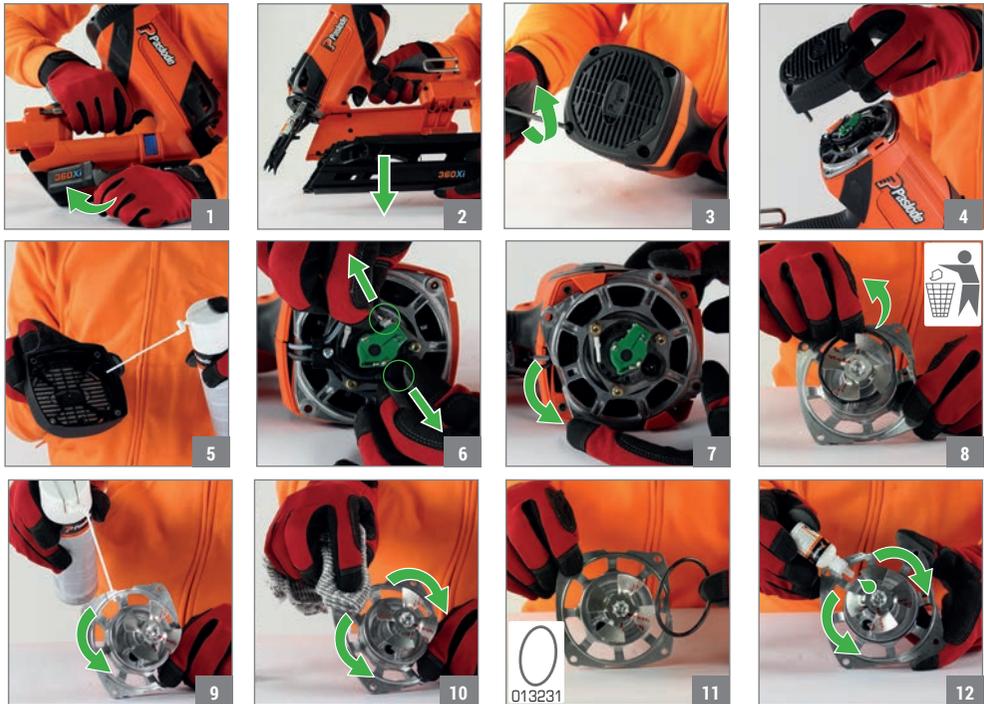

## TOOL MAINTENANCE: FAN continued.....

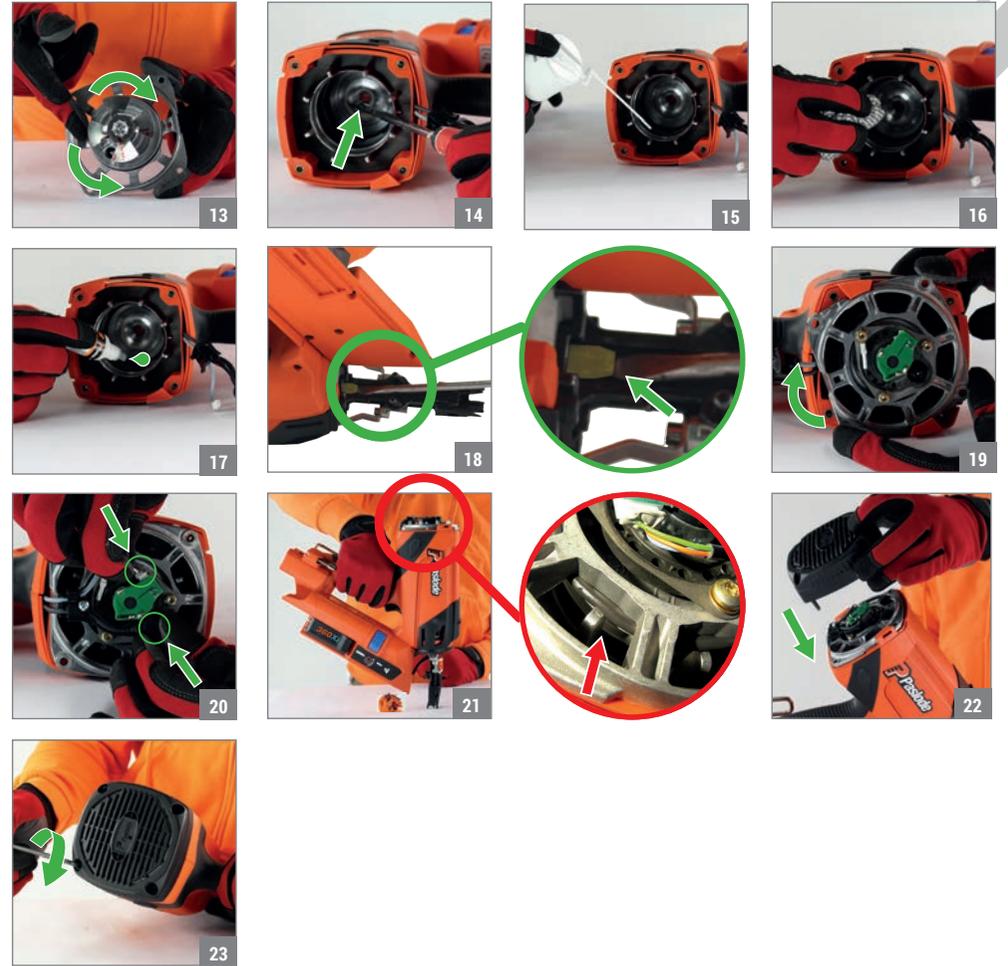


## MAINTENANCE LIGHT RESET

The tool will flash green/red once the tool has fired 50 000 shots. This maintenance light can be reset by holding the start button for 10 seconds. Only reset once maintenance has been carried out on the tool.




## TROUBLE SHOOTING


### ISSUE: HOW TO CLEAR A NAIL JAM

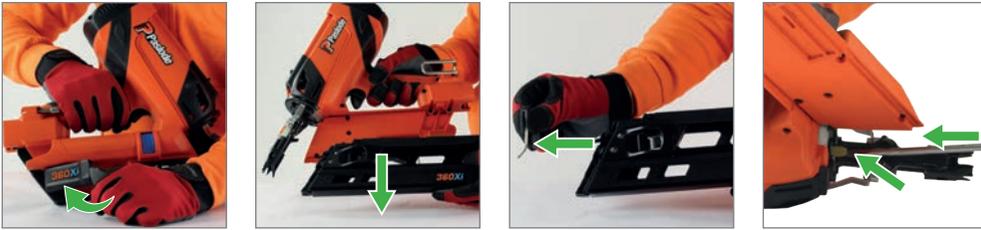


### ISSUE: TRIGGER WORKS HOWEVER FAN NOT WORKING AND NO NAIL COMES OUT

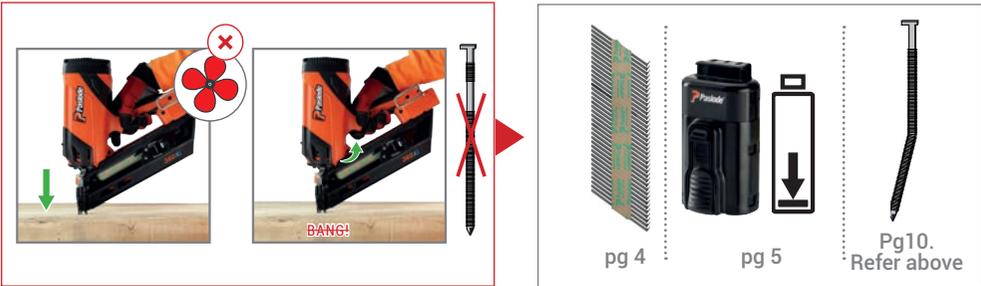

### ISSUE: TRIGGER & FAN WORKING HOWEVER NO NAIL COMES OUT

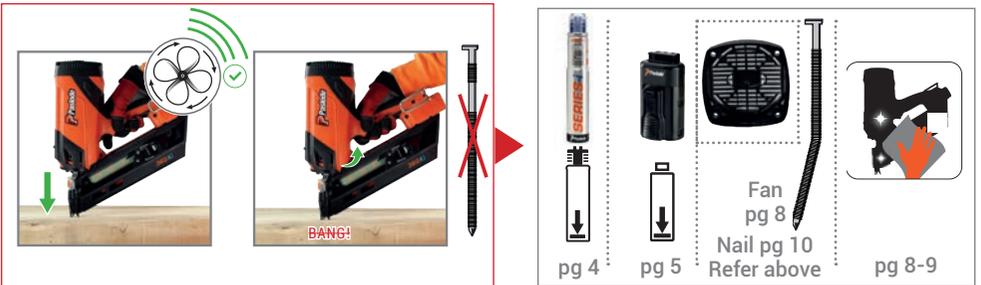

### ISSUE: FAN WORKS AND EXPLOSION HAPPENS HOWEVER NO NAIL OUT

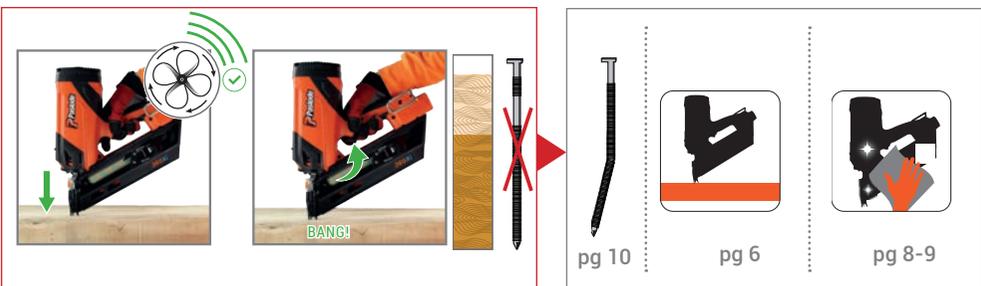

## PASLODE RANGE

### FRAMING

Paslode Framing systems have been the cornerstone of first fix carpentry across the globe for over 30 years, minimising user fatigue and downtime on site.

#### 360XI



#### IM350+



### FINISHING

Paslode finish nailing systems offer the lightest and most compact range of reliable tools on the market. With precision in tight spaces ensures each brad is consistently driven flush which guarantees a high-quality finish

#### IM65



#### IM65A



#### IM50



### SPECIALIST

Paslode Specialist systems offers a lightweight, versatile alternative to hand nailing. They have the power to deliver a secure fixing whilst reducing installation time and labour on site.

#### PPNXi



#### IM45 GN



## WARRANTY



Paslode tools have a standard 2 year warranty, covering all components providing that Manufacturer's Operating Instructions have been followed, that no modifications have been made or non-original components or spare parts have been used, and that the tool has not been accidentally damaged or neglected.



019690-1  
11/2020



Route de Lyon F-26500  
Bourg-lès-Valence

ITWCP UK Glenrothes  
Fife UK KY6 2SW