EC SNK EF C

ECHO Tap Range
Echo Easyfit Sink Mixer Chrome




Specification

Product Type:	Kitchen Taps
Main Construction Material:	Brass
Mount Type:	Deck
Maximum Worktop Depth (mm):	35
Handle Type:	Lever
Connection Inlet:	1/2" BSP Flexible Tails with Isolation Valves
Connection Outlet:	M24 Aerator
Number of Tap Holes:	1
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.4 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	Yes

Features:

- Install your tap in minutes from above the sink, thanks to the innovative Top Fix Easyfit technology
- Easily repair, maintain or replace your kitchen tap using the two isolation valves that let you shut off the water supply at the base
- Experience effortless rinsing with a convenient swivel spout
- Supplied with everything you need for a hassle-free installation, including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexible tails
- Install with confidence, thanks to the high-quality metal fixings that keep your tap securely in place

Dimensions (measurements in mm)

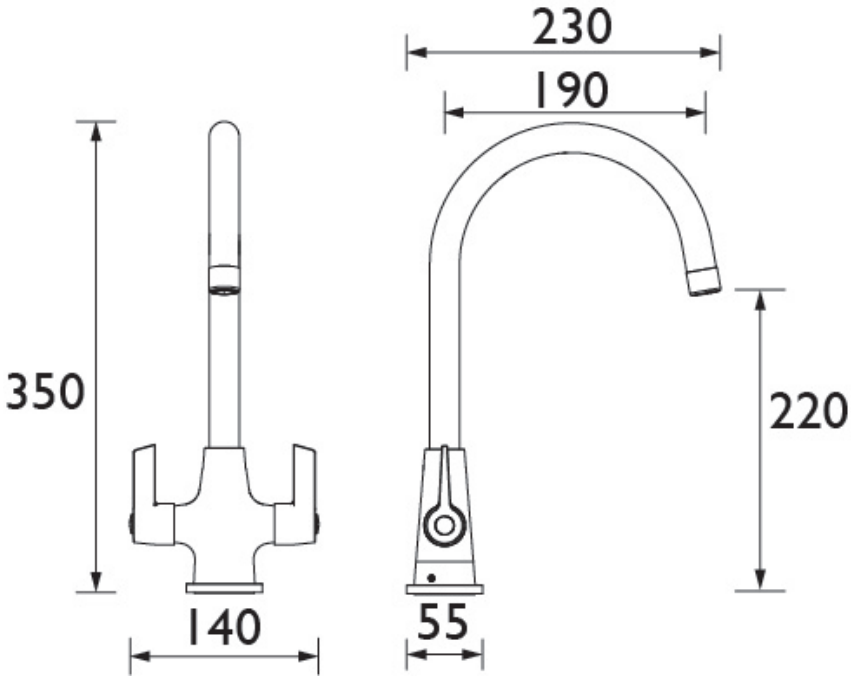

Product Certifications:

WRAS Certificate No: 260103301
WRAS Expiry Date: 31/12/2031

Unified Water Label 31.4 l/min

Flow Rates (l/min)

System Pressure (bar)	0.4	0.5	1	2	3	5
EC SNK EF C (mixed)	9.8	11.2	17.1	25.4	31.4	40.8

TECHNICAL DATA SHEET

LIFETIME GUARANTEE *

BRISTAN

D17

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Lifetime guarantee applies to products purchased on or after 01/04/2026.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.